

MODEL ITS-50R-J TRANSFER SWITCH

MAXIMUM SERVICE
120/240V 60Hz 1 Phase
50 A/Pole 4 Pole
TIME DELAY 15-25 Seconds
GENERAL LOADS




CHASSIS GROUND	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN
	GENERATOR				POWERCORD				PANEL			

TIGHTEN SCREWS TO 45 INCH POUNDS

ELECTRICAL CONNECTIONS TYPICAL GENERATOR/ POWERCORD

SWITCH PRIORITY
OVERRIDE MODE: GENERATOR
DEFAULT MODE: POWERCORD

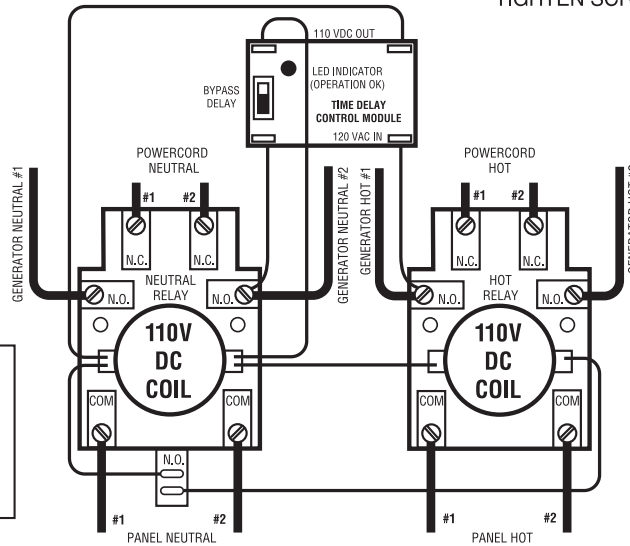

WARNING

MULTIPLE 120/240 VOLT POWER SOURCES. ALL MUST BE SECURED OFF BEFORE SERVICING. REFER SERVICE TO A QUALIFIED ELECTRICIAN.

AVERTISSEMENT

COUPER TOUTES LES SOURCES D'ALIMENTATION AVANT DEFAIRE L'ENTRETIEN ET LES REPERATIONS. PLUS D'UN CIRCUITSOUS TENSIONS-VOIR SCHEMA.

NOTE

120/240 VOLT TRANSFER SWITCHES MAY NOT OPERATE IF POWER IS LOST ON ONE HOT LEG WHEN RUNNING ON 240 VOLTS.

Use copper wire only
75° C. minimum.

TYPE 1