



MODEL NO: _____
 TYPE: _____
 PROJECT: _____
 COMMENTS: _____

LAMPS OPERATED*

Most 2'-4' 28W & 54W T5, 17W to 30W T6, or 17W to 40W T8 lamps incl. HO and 36W-55W 4-pin long compact lamps

*Refer to Lumen Reference Chart for list of compatible lamps

DESCRIPTION:

The **ISL-54** from IOTA Engineering is a UL Listed fluorescent emergency ballast that allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the **ISL-54** switches to the emergency mode and operates **one** of the existing lamps for **90 minutes**. The unit contains a battery, charger, and inverter circuit in a single can. The **ISL-54** operates **T5, T6, and T8** lamps, including HO and 4-pin long compact fluorescent lamps from 36-55 watts at an initial output of up to **825 lumens** for one lamp. The **ISL-54** delivers high performance in a slim design, and is ideal for use in linear lighting fixtures where ballast compartment space is limited.


TECHNICAL SPECIFICATIONS

Input Voltage (Dual) 120/277V, 60Hz
 Input Wattage 2.5 Watts
 Lamps Operated..... Most 2'-4' 28W & 54W T5 or 17W to 30W T6 fluorescent lamps or T8 lamps incl. HO and 36W-55W 4-pin long compact lamps
 Emergency Operation.....90 minutes
 Initial Illumination (1) lamp up to 825 lumens
 Operating Temp0° to 55° C
 Battery24 Hour Recharge 7-10 Year Life Expectancy
 Weight 2.4 lbs.
 Approval UL and CUL Listed



CASE DIMENSIONS

17.5" x 1.18" x 1.15" (mounting center 17.0")

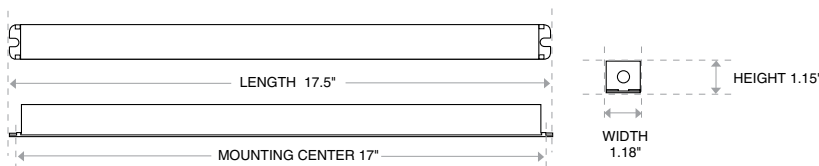

PRODUCT ADVANTAGES

Time Delay feature for compatibility with End-of-Lamp-Life circuitry

Open Circuit Isolation protects unit when load is absent

Slim profile design is ideal for smaller ballast compartments

FEATURES

Will cold start and operate all specified lamps

Long life high temperature recyclable Ni-Cad battery

Galvanized steel case

Includes test switch and charge indicator accessory kit

For use with switched or unswitched fixtures

5-Year Warranty. See Warranty Page for details.

Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting Requirements

International Voltage and Damp Location Models available



P.O. BOX 11846 TUCSON, AZ 85734
 (520) 294-3292 • FAX (520) 741-2837

www.iotaengineering.com

ISL-54

FLUORESCENT EMERGENCY BALLAST

OPTIONS

CONFIGURATION

- TBTS (STANDARD)
- TWO-PIECE TEST SWITCH AND CHARGE INDICATOR
- TWO-PIECE WITH OEM 90° CONNECTOR

SPECIALTY

- DL (DAMP LOCATION)

VOLTAGE RATINGS

- 120/277V 60HZ (STANDARD)
- 220V 50HZ
- 240V 60HZ
- 120V 50HZ

AVERAGE LUMEN RATINGS

LAMP	1 LAMP
14W T5	450
21W T5	500
24W T5	450
28W T5	800
39W T5	700
54W T5	825
17W T6	500
27W T6	600
30W T6	650
F17 T8	650
F25 T8	650
F28 T8	630
F32 T8	700
F40 T8	600
36W Long Compact	675
40W Long Compact	675
50W Long Compact	650
55W Long Compact	650
22W Circline T5	425
40W Circline T5	650

ISL-54 SAMPLE SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with an **IOTA ISL-54** fluorescent emergency battery pack. The **ISL-54** shall consist of a high temperature, maintenance-free nickel cadmium battery, charger board and an electronic circuit enclosed in a 17.5" x 1.18" x 1.15" vandal-resistant steel case for installation either inside the wireway or on top of the fixture. A combination one piece long-life LED charge indicator light and test switch shall be included. The fluorescent EM pack shall operate one (2'-4') T5, T6 or T8 HO or VHO linear lamp or one 36W-55W 4-pin long compact fluorescent lamp. The **ISL-54** shall provide reduced illumination for a minimum of 90 minutes in the emergency mode with a total initial output of 825 lumens. The unit shall have 2.5 watts of input power and a battery capacity of 24 watt hours. The **ISL-54** is UL Listed and meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements. The **ISL-54** is warranted for a full five (5) years from the date of purchase.

REMOTE MOUNTING

When battery packs are remote mounted, the remote distance can not exceed $\frac{1}{2}$ of the distance from ballast to lamp specified by the A.C. ballast manufacturer. For example, if the A.C. ballast manufacturer recommends no more than 25' remote distance, then the battery pack should not exceed 12' $\frac{1}{2}$ '. The maximum allowable remote mounting distance is 50' from the lamp.