

COMPACT FLUORESCENT

I-13-L FLUORESCENT EMERGENCY BALLAST KIT FOR 2-PIN COMPACT LAMPS



LUMEN OUTPUT
(1 Lamp) 650 Lumens

LAMPS OPERATED
7, 9 & 13 Watt Twin Tube 2-pin with integral starter 9-13W USA Quad 2-pin with integral starter

EMERGENCY OPERATION
90 Minutes


The I-13-L Compact Fluorescent Emergency Ballast Kit is designed to allow shallow or unusually shaped fixtures (such as wall packs, sconces, and recessed stair fixtures) to be configured for normal and emergency operation. The unit consists of an open circuit board assembly and battery pack, which is offered in three profile options. In the event of a power failure, the I-13-L switches to the emergency mode and operates **one** of the existing lamps for **90 minutes**. The I-13-L can be used with most 7, 9, or 13 watt **2-pin** twin tube compact fluorescent lamps, with a total initial output of up to **650 lumens** for one lamp. The I-13-L is a U.L. Recognized Component for factory installation only.

CASE DIMENSIONS		TECHNICAL SPECIFICATIONS	
CIRCUIT BOARD ASSEMBLY		Input Voltage 120/277V, 60Hz	
Length	4 in.	Input Wattage	3.5 Watts
Width	2.75 in.	Lamps Operated	Most 7, 9, or 13 watt 2-pin twin tube compact lamps
Height	1.25 in.*	Emergency Operation	90 minutes
Mounting Centers	3.5 x 2.3 in.	Initial Illumination	650 lumens
Weight	0.5 lbs	U.L. Conditions of Acceptability Must be factory wired	
*Height includes .25 inch stand-off		Battery temperature must not exceed 55° C	
BATTERY PACKS			
	STICK	IN-LINE	TRIANGLE
Length	7.375 in.	3.875 in.	2.6 in.
Width	1.375 in.	1.25 in.	2.4 in.
Height	1.375 in.	2.375 in.	2.375 in.
Weight	1 lb.	1 lb.	1 lb.

- U.L. Recognized Component
- Will cold start and operate all specified lamps
- Long life high temperature recyclable Ni-Cad battery
- 90 minute emergency operation
- 5-Year Warranty. See Warranty Page for details.

- Includes test switch and charge indicator accessories
- Dual voltage 120/277V, 60Hz
- Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting Requirements

MODEL NO: I-13-L	TYPE:
PROJECT:	
COMMENTS:	

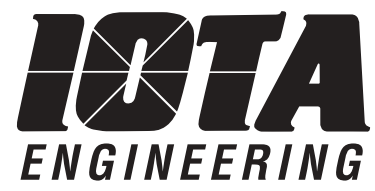

P.O. BOX 11846 TUCSON, AZ 85734
(520) 294-3292 • FAX (520) 741-2837
www.iotaengineering.com

OPTIONS**CONFIGURATION** TWO-PIECE (TEST SWITCH AND CHARGE INDICATOR)**BATTERY PROFILE**

- STICK
 IN-LINE
 TRIANGLE

VOLTAGE RATINGS

- 120/277V 60HZ (STANDARD)
 220V 50HZ
 240V 60HZ
 120V 50HZ

AVERAGE LUMEN RATINGS

LAMP	1 LAMP
9W PL CF 2-pin	500
13W PL CF 2-pin	650