



AC OUTPUT



MODEL NO: _____
 TYPE: _____
 PROJECT: _____
 COMMENTS: _____

INITIAL LUMEN OUTPUT

1100 Lumens

LAMPS OPERATED*



(1) 10W-57W 4-PIN Compact
 (2) 10W-26W 4-PIN Compact



Select LED Retrofit Tubes

*Refer to Lumen Reference Chart and LED Retrofit Reference Chart for list of compatible lamps.

DESCRIPTION

The **I-420-EM-R** from IOTA Engineering is a UL Listed fluorescent emergency ballast that allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the **I-420-EM-R** switches to the emergency mode and operates **one or two** of the existing lamps for **90 minutes**. The unit contains a battery, charger, and inverter circuit in a single can. The **I-420-EM-R** can be used with most 10W-57W twin, triple, quad tube, 2D and Straight **4-pin** compact fluorescent lamps, with an initial output of up to **1100 lumens** for one or two lamps. The **I-420-EM-R** utilizes **AC output to ensure compatibility with new lamp technologies**, and features lamp selector leads for optimizing light output for designated lamp types. The **I-420-EM-R** is provided with flex for wiring to the fixture or ballast compartment. A single-piece test switch and charge indicator is provided with all necessary hardware for installation within the downlight reflector. The **I-420-EM-R** is suitable for use in damp locations.


SPECIFICATIONS

Input Voltage	(Dual) 120/277V, 60Hz
Input Wattage	3.5 Watts
Lamps Operated	10W-57W 4-pin Rapid Start Compact Lamps including Twin, Triple, Quad Tube, 2D & Straight
Emergency Operation	(1) 10W-57W or (2) 10W-26W 90 minutes
Initial Illumination	1100 lumens (2) lamps 550 lumens each lamp
Operating Temp	0° to 50° C
Battery	24 Hour Recharge 7-10 Year Life Expectancy
Weight	5.4 lbs.
Approval	UL and CUL Listed



DIMENSIONS

13.3" x 2.4" x 1.5" (mounting center 12.75")

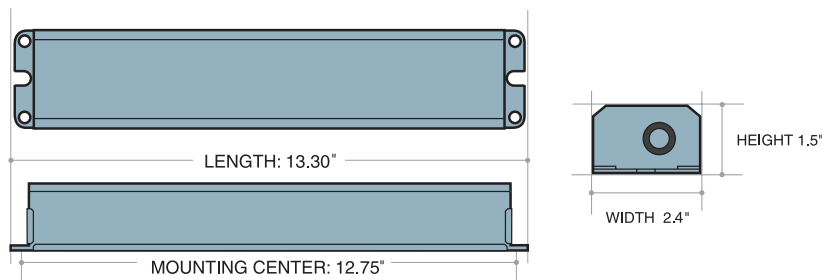

PRODUCT ADVANTAGES

- **AC output for compatibility with Low-Mercury Content Amalgam lamps**
- **Time Delay feature for compatibility with End-of-Lamp-Life Circuitry**
- **Open Circuit Isolation protects unit when load is absent**
- **Reflector-mount single-piece test switch and charge indicator**

FEATURES

- Will cold start and operate all specified lamps
- Long life high temperature recyclable Ni-Cad battery
- Galvanized steel case
- Includes one-piece reflector-mount TBTS test switch and charge indicator
- For use with switched or unswitched fixtures
- **5-Year Warranty.** See Warranty Page for details.
- Lamp selector leads optimize light output for designated lamp type
- Rated for use in damp locations and plenum fixtures.
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- RoHS Compliant
- International Voltage Models available



FLUORESCENT

COMPACT

I-420-EM-R

FLUORESCENT EMERGENCY BALLAST FOR 4-PIN LAMPS

OPTIONS

TEST KIT CONFIGURATION

- LIGHTED TEST SWITCH IN REFLECTOR
RECOMMENDED FOR OEM INSTALLATION ONLY.
CONTACT CUSTOMER SERVICE FOR DETAILS.

MOUNTING CONFIGURATION

- R (Dual Flex)
- R-J (Junction Box Mount with Single Flex)

VOLTAGE RATINGS

- 120/277V 60HZ (STANDARD)
- 220V 50HZ
- 240V 60HZ
- 120V 50HZ

INITIAL LUMEN RATINGS

LAMP	1 LAMP	2 LAMPS
13W PL CF 4-PIN	570	900
18W PL CF QUAD 4-PIN	680	1010
26W PL CF QUAD 4-PIN	810	1200
32W PL CF QUAD 4-PIN	910	
42W PL CF QUAD 4-PIN	1040	
57W PL CF QUAD 4-PIN	1180	

LED Retrofit Tube Options

This IOTA Emergency Ballast is UL Listed for emergency operation of select LED retrofit tube applications. For a complete list of acceptable LED retrofit tube options, refer to the **IOTA LED Retrofit Tube Reference Chart** at www.iotaengineering.com/IOTA-LED-Retrofit.pdf

I-420-EM-R SAMPLE SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with an **IOTA I-420-EM-R** fluorescent emergency battery pack. The **I-420-EM-R** shall consist of a high temperature, maintenance-free nickel cadmium battery, charger board and an electronic circuit enclosed in a 13.3" x 2.4" x 1.5" vandal-resistant galvanized steel case. The unit is designed for installation on top of the fixture and is equipped with 1/2" flex for wiring to the fixture or ballast compartment. A combination one-piece long-life LED charge indicator light and test switch shall be included for installation directly within the reflector. The fluorescent EM pack shall operate one 10W-57W or two 10W-26W twin, triple, quad tube, 2D or straight **4-pin** fluorescent lamps. The **I-420-EM-R** shall provide reduced illumination for a minimum of 90 minutes in the emergency mode with a total initial output of 1100 lumens. **The I-420-EM-R will operate the lamp with AC output** and will feature lamp selector leads for optimizing light output for the designated lamp type. The **I-420-EM-R** shall have 4 watts of input power and a battery capacity of 24 watt hours. The **I-420-EM-R** is UL Listed and meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements, and rated for use in damp locations. The **I-420-EM-R** is warranted for a full five (5) years from the date of purchase.

REMOTE MOUNTING

When battery packs are remote mounted, consult Customer Service for the maximum allowable distance between the battery pack and lamp(s).