



AC OUTPUT



## DESCRIPTION

The **ISL-54** from IOTA Engineering is a UL Listed fluorescent emergency ballast that allows the same fixture to be used for both normal and emergency operation. In the event of a power failure, the **ISL-54** switches to the emergency mode and operates **one** of the existing lamps for **90 minutes**. The unit contains a battery, charger, and inverter circuit in a single can. The **ISL-54** operates **T5, T6, and T8** lamps, including HO and 4-pin long compact fluorescent lamps from 36-55 watts at an initial output of up to **825 lumens** for one lamp. **The ISL-54 utilizes AC output to ensure compatibility with new lamp technologies.** The **ISL-54** delivers high performance in a slim design and is ideal for use in linear lighting fixtures where ballast compartment space is limited. The **ISL-54** is suitable for use in damp locations and in enclosed and gasketed fixtures.


## SPECIFICATIONS

Input Voltage .....	(Dual) 120/277V, 60Hz
Input Wattage .....	2.5 Watts
Lamps Operated .....	Most 2'-4' 14W to 54W T5 or 17W to 30W T6 fluorescent lamps or T8 lamps incl. HO and 36W-55W 4-pin long compact lamps
Emergency Operation .....	90 minutes
Initial Illumination .....	(1) lamp up to 825 lumens
Operating Temp .....	0° to 50° C
Battery .....	24 Hour Recharge 7-10 Year Life Expectancy
Weight .....	2.4 lbs.
Approval .....	UL and CUL Listed



## DIMENSIONS



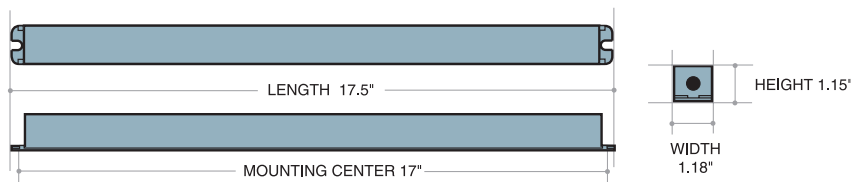

17.5" x 1.18" x 1.15" (mounting center 17.0")



MODEL NO: \_\_\_\_\_  
 TYPE: \_\_\_\_\_  
 PROJECT: \_\_\_\_\_  
 COMMENTS: \_\_\_\_\_

INITIAL LUMEN OUTPUT  
825 Lumens

### LAMPS OPERATED\*

-  [1] 2-4 ft. 14W - 54W T5
-  [1] 2-4 ft. 17W - 40W T8, incl. HO
-  [1] 36W-55W Bi-x
-  Select LED Retrofit Tubes

\*Refer to Lumen Reference Chart and LED Retrofit Reference Chart for list of compatible lamps.

### PRODUCT ADVANTAGES

- **Time Delay feature for compatibility with End-of-Lamp-Life circuitry**
- **Open Circuit Isolation protects unit when load is absent**
- **AC output for compatibility with Low-Mercury Content Amalgam lamps**
- **Slim profile design is ideal for smaller ballast compartments**

### FEATURES

- Will cold start and operate all specified lamps
- Long life high temperature recyclable Ni-Cad battery
- Galvanized steel case
- Includes test switch and charge indicator accessory kit
- For use with switched or unswitched fixtures
- Rated for use in damp locations, plenum, and enclosed and gasketed fixtures
- **5-Year Warranty.** See Warranty Page for details.
- Meets or exceeds all NEC, IBC, and Life Safety Code Emergency Lighting Requirements
- RoHS Compliant
- International Voltage Models available

FLUORESCENT

SLIM PROFILE



# ISL-54

SLIM PROFILE FLUORESCENT EMERGENCY BALLAST

## OPTIONS

### TEST KIT CONFIGURATION

- TBTS
- TWO-PIECE TEST SWITCH AND CHARGE INDICATOR

### VOLTAGE RATINGS

- 120/277V 60HZ (STANDARD)
- 220V 50HZ
- 240V 60HZ
- 120V 50HZ

## INITIAL LUMEN RATINGS

LAMP	1 LAMP
14W T5	450
21W T5	500
24W T5	450
28W T5	800
39W T5	700
54W T5	825
17W T6	500
27W T6	600
30W T6	650
F17 T8	650
F25 T8	650
F28 T8	630
F32 T8	700
F40 T8	600
36W Long Compact	675
40W Long Compact	675
50W Long Compact	650
55W Long Compact	650
22W Circline T5	425
40W Circline T5	650

### LED Retrofit Tube Options

This IOTA Emergency Ballast is UL Listed for emergency operation of select LED retrofit tube applications. For a complete list of acceptable LED retrofit tube options, refer to the **IOTA LED Retrofit Tube Reference Chart** at [www.iotaengineering.com/IOTA-LED-Retrofit.pdf](http://www.iotaengineering.com/IOTA-LED-Retrofit.pdf)

## ISL-54 SAMPLE SPECIFICATION

Emergency lighting shall be provided by using a standard fluorescent fixture equipped with an **IOTA ISL-54** fluorescent emergency battery pack. The **ISL-54** shall consist of a high temperature, maintenance-free nickel cadmium battery, charger board and an electronic circuit enclosed in a 17.5" x 1.18" x 1.15" vandal-resistant steel case for installation either inside the wireway or on top of the fixture. A combination one piece long-life LED charge indicator light and test switch shall be included. The fluorescent EM pack shall operate one (2'-4') T5, T6 or T8 HO or VHO linear lamp or one 36W-55W 4-pin long compact fluorescent lamp. The **ISL-54** shall provide reduced illumination for a minimum of 90 minutes in the emergency mode with a total initial output of 825 lumens, and **will operate the lamp with AC output**. The unit shall have 2.5 watts of input power and a battery capacity of 24 watt hours. The **ISL-54** is UL Listed and meets or exceeds all NEC and Life Safety Code Emergency Lighting Requirements, and rated for use in damp locations and in enclosed and gasketed fixtures. The **ISL-54** is warranted for a full five (5) years from the date of purchase.

## REMOTE MOUNTING

When battery packs are remote mounted, consult Customer Service for the maximum allowable distance between the battery pack and lamp(s).