

MODEL ITS-50R
TRANSFER SWITCH


MAXIMUM SERVICE
 120/240V 60Hz 1 Phase
 50 A/Pole 4 Pole
 TIME DELAY 20-30 Seconds
 GENERAL LOADS

CHASSIS GROUND	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN	HOT 1 BLK	NEUTRAL WHT	HOT 2 RED	GRND GRN
	GENERATOR				POWERCORD				PANEL			

TIGHTEN SCREWS TO 45 INCH POUNDS

ELECTRICAL CONNECTIONS

TYPICAL GENERATOR/POWERCORD

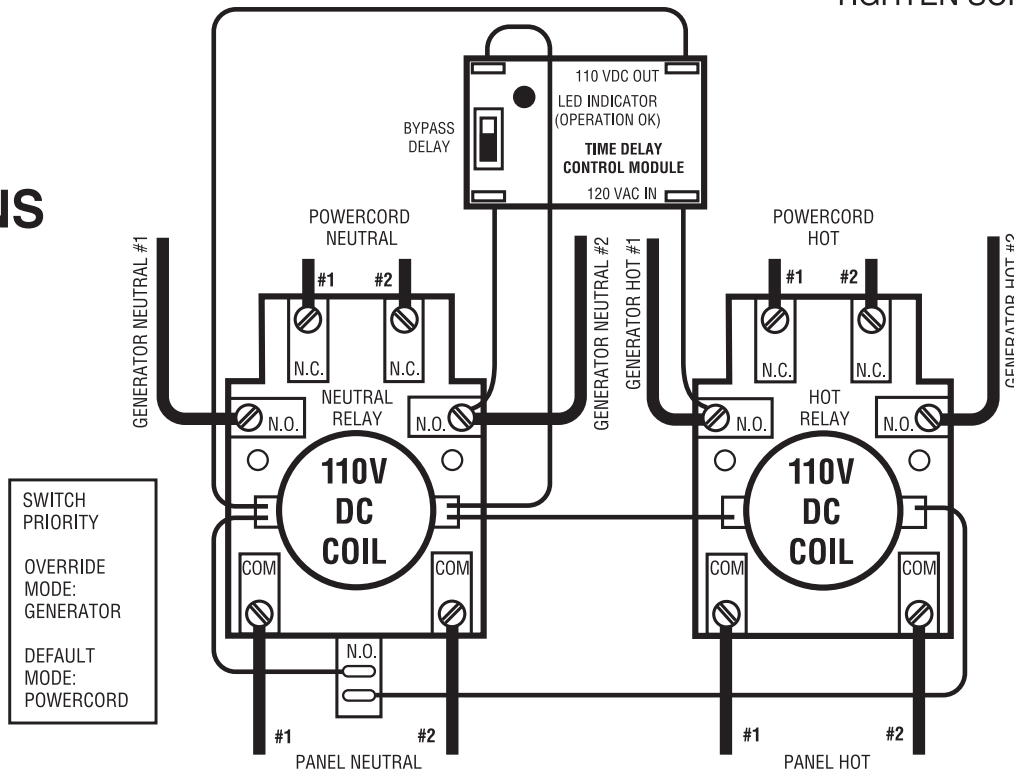

WARNING

MULTIPLE 120/240 VOLT POWER SOURCES. ALL MUST BE SECURED OFF BEFORE SERVICING. REFER SERVICE TO A QUALIFIED ELECTRICIAN.

NOTE

120/240 VOLT TRANSFER SWITCHES MAY NOT OPERATE IF POWER IS LOST ON ONE HOT LEG WHEN RUNNING ON 240 VOLTS.

Use copper wire only
 75° C. minimum.