

SPECIALTY PRODUCTS

I-160-ACL

FLUORESCENT EMERGENCY BALLAST KIT



LUMEN OUTPUT

(1) Lamp - 3000 Lumens
(2) Lamps - 1500 Lumens Per Lamp

LAMPS OPERATED

32W to 42W 4-pin compact fluorescent lamps

EMERGENCY OPERATION

90 Minutes


The **I-160-ACL** Emergency Ballast Kit from IOTA Engineering allows the fixture to be used for **emergency operation only**. In the event of a power failure, the **I-160-ACL** switches to the emergency mode and operates **one or two** lamps for **90 minutes**. The unit consists of an open circuit board assembly and battery pack that is designed for integral installation within the fixture. The **I-160-ACL** can be used with most **32W to 42W** 4-pin compact lamps, with an initial output of up to **3000 lumens** for one or two lamps. The **I-160-ACL** is **U.L. Component Recognized** for factory installation. It should not be field-installed.

CASE DIMENSIONS	TECHNICAL SPECIFICATIONS
CIRCUIT BOARD ASSEMBLY Length 7.1 in. Width 2.65 in. Height 1.154 in.	Input Voltage 120/277V, 60Hz Input Wattage 4.5 Watts Lamps Operated Most 32W and 42W 4-pin compact fluorescent lamps Emergency Operation 90 min. Initial Illumination (1) lamp 3000 lumens (2) lamps 1500 lumens each lamp Operating Temp 0° to 55° C U.L. Conditions of Acceptability Must be factory wired
BATTERY PACK Length 7 in. Height 2.56 in. Width 2.56 in.	Weight (circuit board assembly)90 lbs. (battery pack) 3.25 lbs.

- U.L. Component Recognized
- Will cold start and operate all specified lamps
- Long life high temperature recyclable Ni-Cad battery
- Dual voltage 120/277V, 60Hz
- 5-Year Warranty. See Warranty page for details.

- Includes test switch and charge indicator accessory kit
- 90 minute emergency operation
- Meets or exceeds all National Electrical Code and Life Safety Code Emergency Lighting Requirements

MODEL NO: I-160-ACL	TYPE:
PROJECT:	
COMMENTS:	

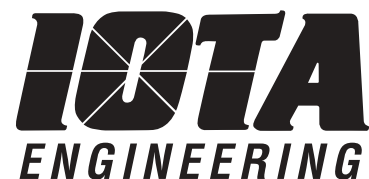

P.O. BOX 11846 TUCSON, AZ 85734
(520) 294-3292 • FAX (520) 741-2837

www.iotaengineering.com