


ETS-20-DR WIRING WITH DUAL DIMMING ZONES

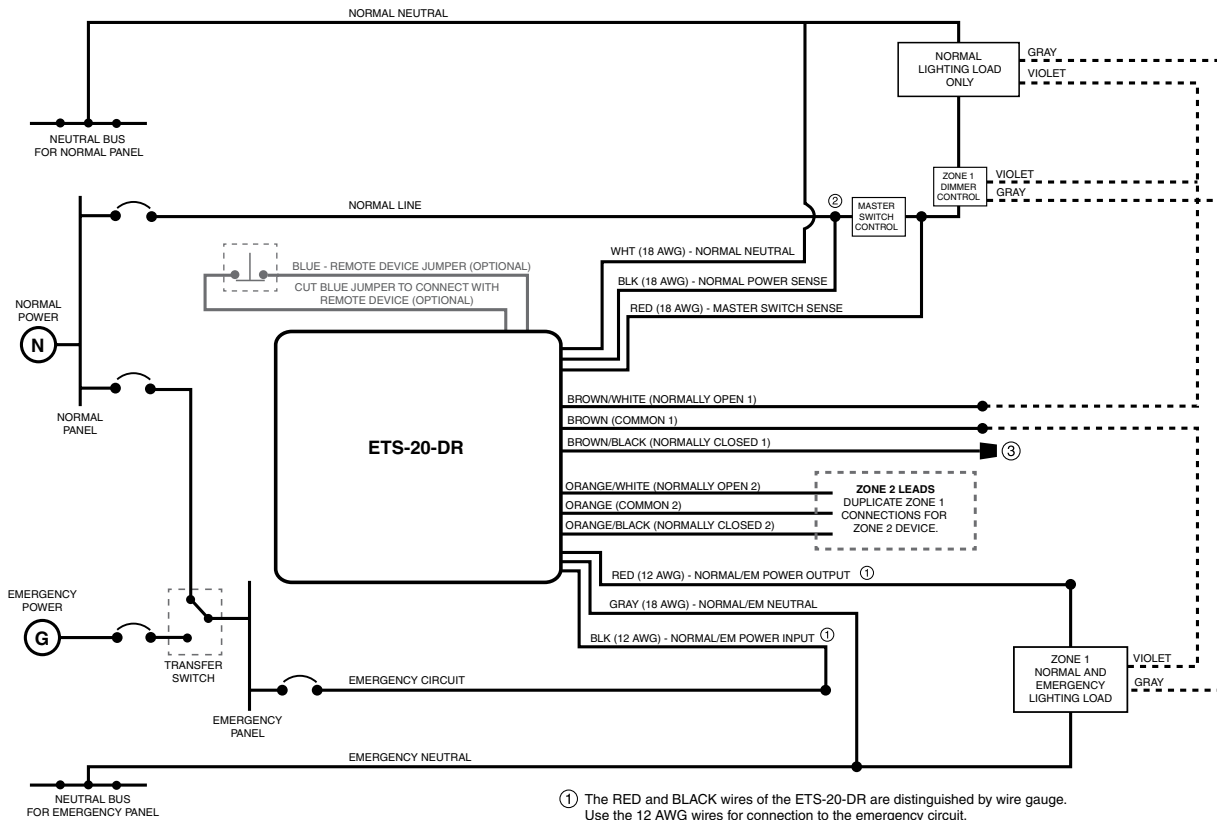

- ① The RED and BLACK wires of the ETS-20-DR are distinguished by wire gauge. Use the 12 AWG wires for connection to the emergency circuit.
- ② The BLACK (Normal Power Sense) lead should be connected to the line side of the Master Switch Control that serves the same area as the emergency lighting, ensuring that the emergency lighting in the controlled area turns on during a localized power failure.
- ③ Cap unused lead.

ETS_20_DR_WIRES.EPS

NOTES

Wiring and Troubleshooting Tips are available on-line at <http://www.iotaengineering.com/wiringtips.pdf>

